

# NEON<sup>3</sup> CCT SERIES

## DYNAMIC CCT ADJUSTABLE


IP65



Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_


### Ordering Guide:

Series	CCT	Output/Foot	Length
NEO3	CCTAD (2700K-6500K)	HO (4.3watts)	CC @XX (Custom cut, specify length)

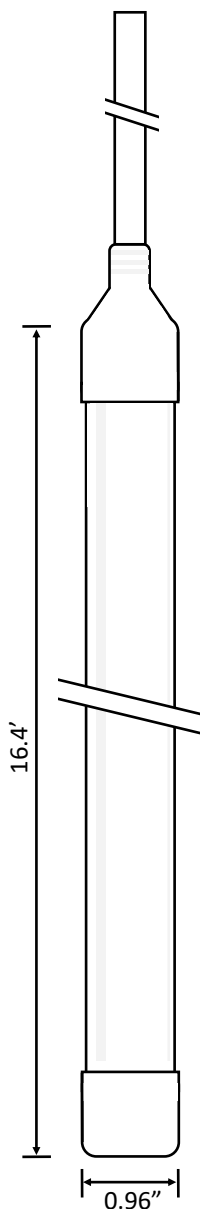



### Features:

- 120° beam angle
- 24 Volt
- Top & side bend
- Bending radius of 5.9"
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP65



Model Number	NEO3-CCTAD-HO
Voltage	24VDC
Lumens/foot	163
CRI	80+
Watts/foot	4.3
Cut section length	3.28"
Diode spacing (pitch) O.C.	0.27"
Diodes per foot	44
Maximum run length	22'
Certifications	UL Listed
Location Rating	IP65

### End Cap Options

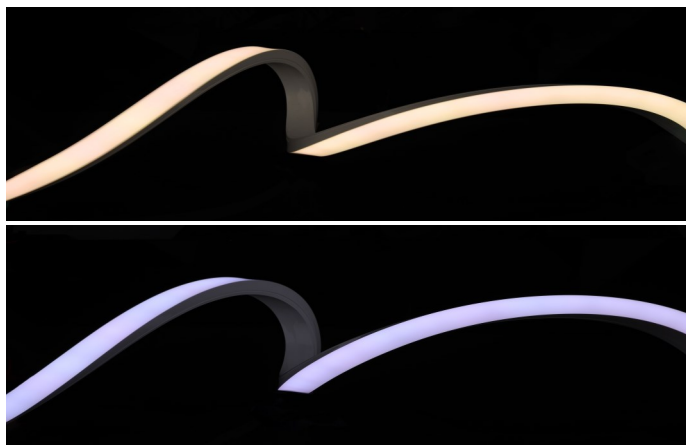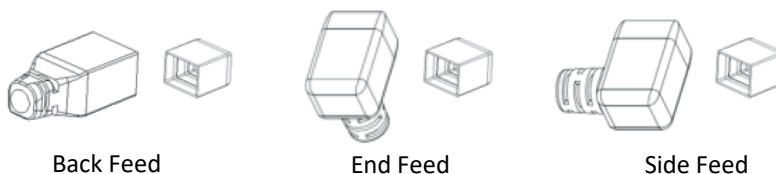

Note: Drawings not to scale.

All Omnilight products are tested and warranted for use exclusively with Omnilight controls & power supplies.

OL1

# NEON<sup>3</sup> CCT SERIES

## DYNAMIC CCT ADJUSTABLE


IP65





Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_

### Accessories:

OCH-CLIP-N3DY





Mounting clips  
(included)



OCH-BRACKET-N3DY



Mounting Brackets  
(optional)


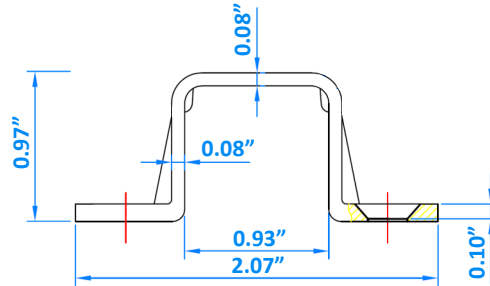


### Channels:


OCH-FLEX-N3DY



Flexible Channel  
(optional)

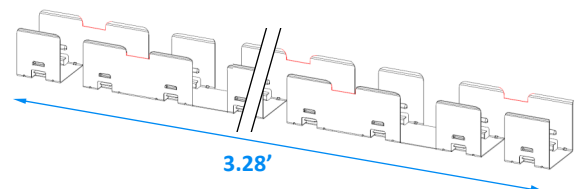

OCH-RIGID-N3DY



Rigid Channel  
(optional)

