

NEON³ COLORS SERIES


STATIC COLOR IP65



Date: _____ Project: _____ Type: _____

Ordering Guide:

Series	-	CCT	-	Output/Foot	-	Length
NEO3	-	RD (Red) GR (Green) BL (Blue) AM (Amber) YL (Yellow) PK (Pink)	-	SO (2.75watts)	-	CC @XX (Custom cut, specify length)

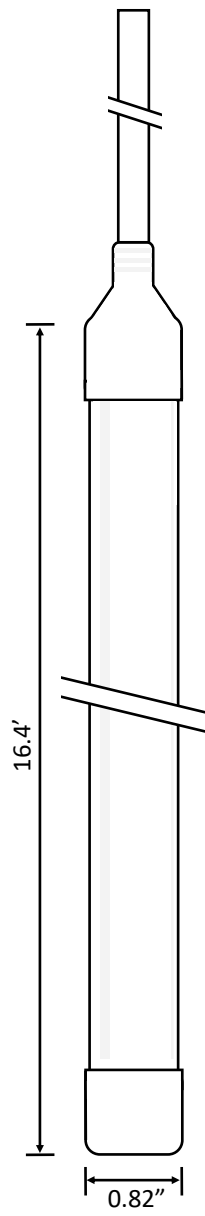


Features:



- 120° beam angle
- 24 Volt
- Top & side bend
- Bending radius of 2.36"
- Dimmable:
ELV, MLV, TRIAC or 0-10V
- Field cuttable :
NO PREDETERMINED CUT POINTS
- 50,000 hour life
- 5 year warranty
- IP65



Model Number		NEO3-XX-SO
Voltage		24VDC
Lumens/foot	Red	22
	Green	116
	Blue	18
	Amber	73
	Yellow	82
	Pink	70
Watts/foot		4.30
Cut section length		∞
Diode spacing (pitch) O.C.		NA
Diodes per foot		30
Maximum run length		16.4'
Certifications		UL Listed
Location Rating		IP65



End Cap Options

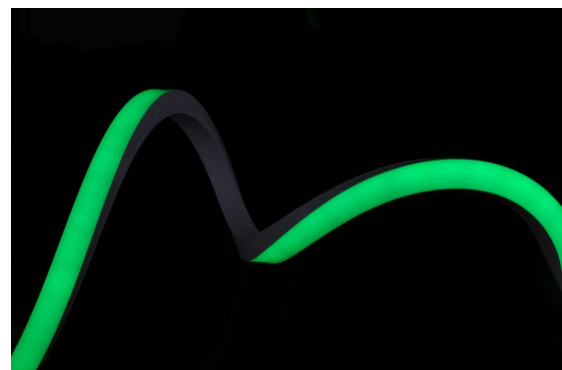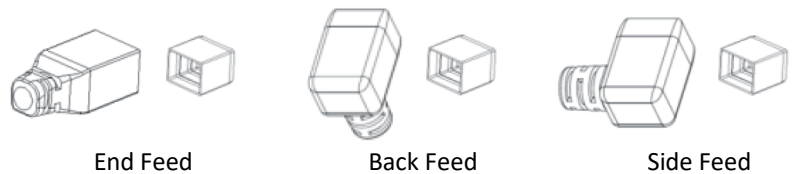

Note: Drawings not to scale.

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies.

OL1

NEON³ COLORS SERIES

STATIC COLOR IP65



Date:

Project:



Type:

Accessories:

OCH-CLIP-N3ST





Mounting clips
(included)



OCH-BRACKET-N3ST




Mounting Brackets
(optional)


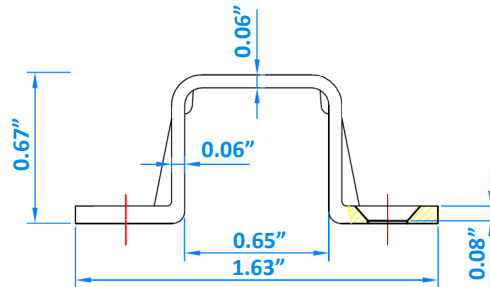


Channels:


OCH-FLEX-N3ST



Flexible Channel
(optional)

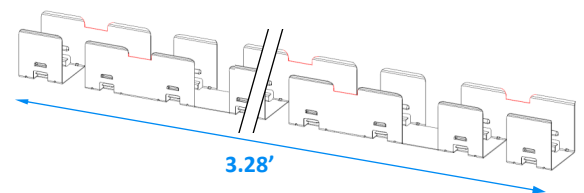

OCH-RIGID-N3ST



Rigid Channel
(optional)

