

NEON³ RGB/RGB+ SERIES


DYNAMIC RGB/RGB+ IP65



Date: _____ Project: _____ Type: _____


Ordering Guide:

Series		CCT		Output/Foot		Length
NEO3	-	RGB RGB30 (3000K)	-	HO (4.3watts RGB) (5.5 watts RGBW)	-	CC @XX (Custom cut, specify length)

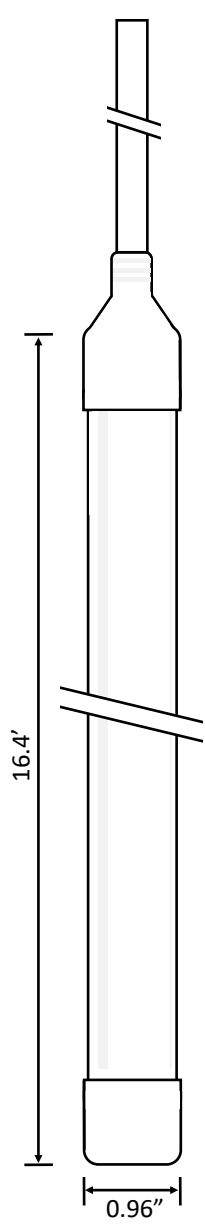



Features:

- 120° beam angle
- 24 Volt
- Top & side bend
- Bending radius of 5.9"
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP65



Model Number	NEO3-RGB-HO	NEO3-RGBXX-HO
Voltage	24VDC	
Lumens/foot	64	131
CRI	N/A	80+ (white diode)
Watts/foot	4.3	5.5
Cut section length	3.28"	
Diode spacing (pitch) O.C.	0.55"	0.55"
Diodes per foot	22	22
Maximum run length	16.4'	16.4'
Certifications	UL Listed	
Location Rating	IP65	

End Cap Options

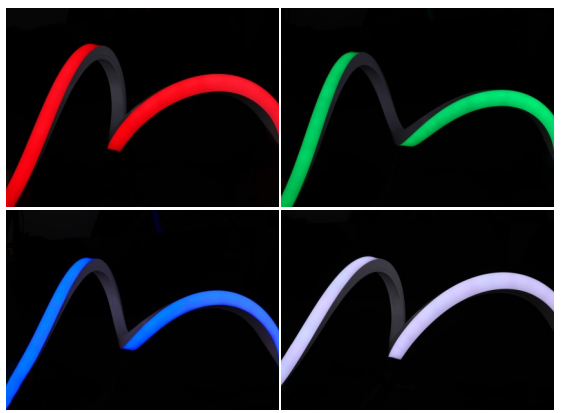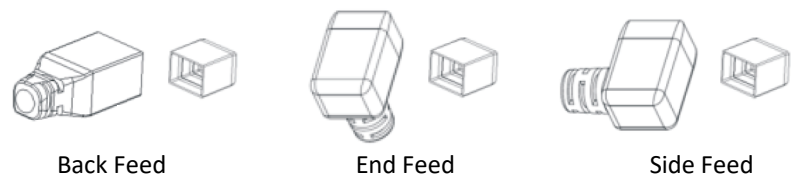

Note: Drawings not to scale.

All Omnilight products are tested and warranted for use exclusively with Omnilight controls & power supplies.

NEON³ RGB/RGB+ SERIES


DYNAMIC RGB/RGB+ IP65





Date: _____ Project: _____ Type: _____

Accessories:

OCH-CLIP-N3DY





Mounting clips
(included)



OCH-BRACKET-N3DY



Mounting Brackets
(optional)


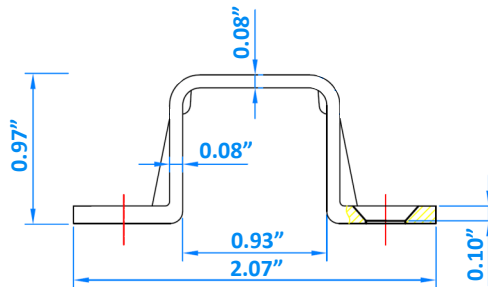


Channels:


OCH-FLEX-N3DY



Flexible Channel
(optional)

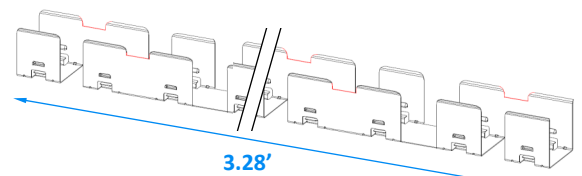

OCH-RIGID-N3DY



Rigid Channel
(optional)

