

# NEON<sup>3</sup> SERIES


## STATIC WHITE IP65



Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_

**Ordering Guide:**

<b>Series</b>	-	<b>CCT</b>	-	<b>Output/Foot</b>	-	<b>Length</b>
NEO3	-	27 (2700K) 30 (3000K) 35 (3500K) 41 (4100K)	-	SO (2.75watts)	-	CC @XX (Custom cut, specify length)

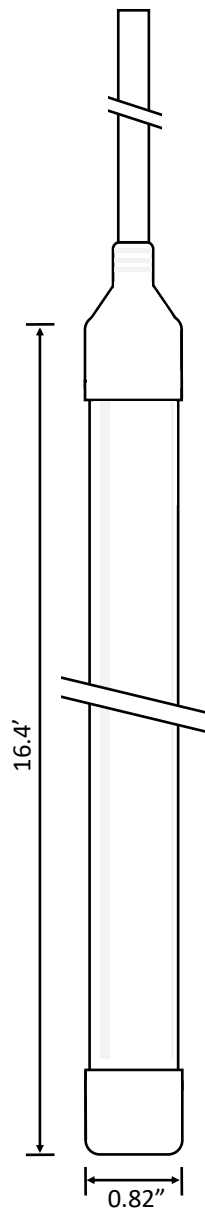


**Features:**



- 120° beam angle
- 24 Volt
- Top & side bend
- Bending radius of 2.36"
- Dimmable:  
ELV,MLV,TRIAC or 0-10V
- Field cuttable :  
NO PREDETERMINED CUT POINTS
- 50,000 hour life
- 5 year warranty
- IP65



Model Number	NEO3-XX-SO	
Voltage	24VDC	
Lumens/foot	2700K	123
	3000K	132
	3500K	140
	4100K	180
Static colors available as well		
CRI	80+	
Watts/foot	2.75	
Cut section length	∞	
Diode spacing (pitch) O.C.	NA	
Diodes per foot	30	
Maximum run length	16.4'	
Certifications	UL Listed	
Location Rating	IP65	



**End Cap Options**

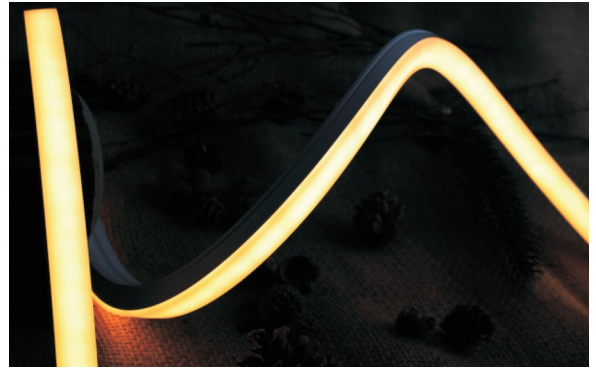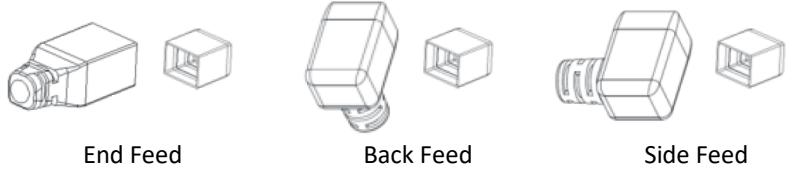

Note: Drawings not to scale.

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies.

# NEON<sup>3</sup> SERIES

## STATIC WHITE IP65





Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_

### Accessories:

OCH-CLIP-N3ST





Mounting clips  
(included)



OCH-BRACKET-N3ST



Mounting Brackets  
(optional)


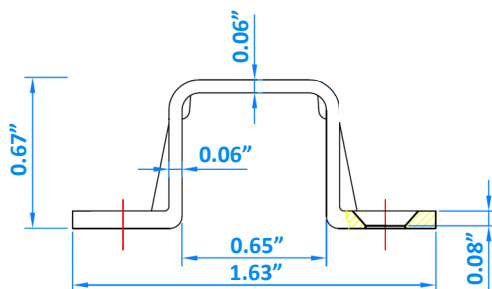


### Channels:


OCH-FLEX-N3ST



Flexible Channel  
(optional)

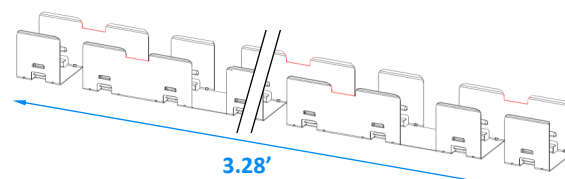

OCH-RIGID-N3ST



Rigid Channel  
(optional)

