

HIGHLIGHT D2W SERIES


EXTERIOR



Date: _____ Project: _____ Type: _____

Ordering Guide:

Series	CCT	Output/Foot	Length
HLTWL	DTW27 (2700K-1800K) DTW30 (3000K-1800K) DTW35 (3500K-1800K)	SO (1.84watts) HO (3.05watts) SHO (6.10watts) UHO (7.32watts)	CC @XX (custom cut, specify footage)

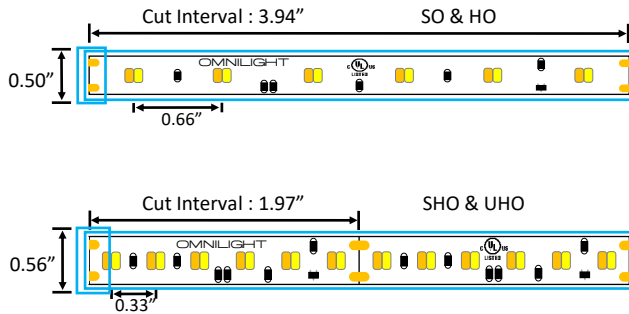

Note: Drawings not to scale.

Features:

- Dim to warm CCT controllable
 - (2700K-1800K)
 - (3000K-1800K)
 - (3500K-1800K)
- 120° beam angle
- 24 Volt
- CRI 90+
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP65

Model Number	HLTWL-D2WXX-SO	HLTWL-D2WXX-HO	HLTWL-D2WXX-SHO	HLTWL-D2WXX-UHO
Lumens/foot 1800K-2700K	158	268	537	670
1800K-3000K	164	274	548	685
1800K-3500K	168	278	550	690
Watts/foot	1.83	3.05	6.10	7.32
Cut section length	3.94"	3.94"	1.97"	1.97"
Diode spacing (pitch) O.C.	0.66"	0.66"	0.33"	0.33"
Diodes per foot	36	36	74	74
Maximum run length	35'	31'	15'6"	13'

Custom cut lengths supplied with 24" soldered lead standard - longer lead can be specified



All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies

OL2