

HUE RGB SERIES


EXTERIOR



Date: _____ Project: _____ Type: _____

Ordering Guide:

Series		Output/Foot		Length
HUEWL	-	RGB	-	
		SO (2.2watts)		16 (full reel - 16.4 feet SO & HO only)
		HO (4.4watts)		(SHO available as - CC only)
		SHO (8.8watts)		CC @XX (custom cut, specify footage)

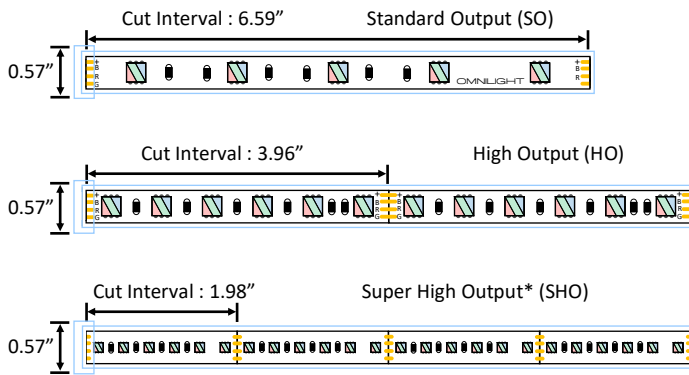

*SHO ribbon must be mounted in channel

Features:

- 120° beam angle
- 24 Volt
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP65

Note: Drawings not to scale.

Model Number	HUE-RGB-SO	HUE-RGB-HO	HUE-RGB-SHO
Lumens/foot	150	325	462
Watts/foot	2.2	4.4	8.8
Cut section length	6.59"	3.96"	1.98"
Diode spacing (pitch) O.C.	1.30"	0.66"	0.33"
Diodes per foot	9	19	33
Maximum run length	21'	21'	10'6"



Custom cut lengths supplied with 24" soldered lead standard - longer lead can be specified

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies