

HVR SERIES - RGB+


INTERIOR/EXTERIOR



Date: _____ Project: _____ Type: _____

Ordering Guide:

Series		CCT		Output/Foot		Length
HVR	-	RGB (RGB) RGBW (RGB+W)	-	SO (2 Watts - RGB) SO (3 Watts - RGBW)	-	CC @XX (custom cut, specify footage)

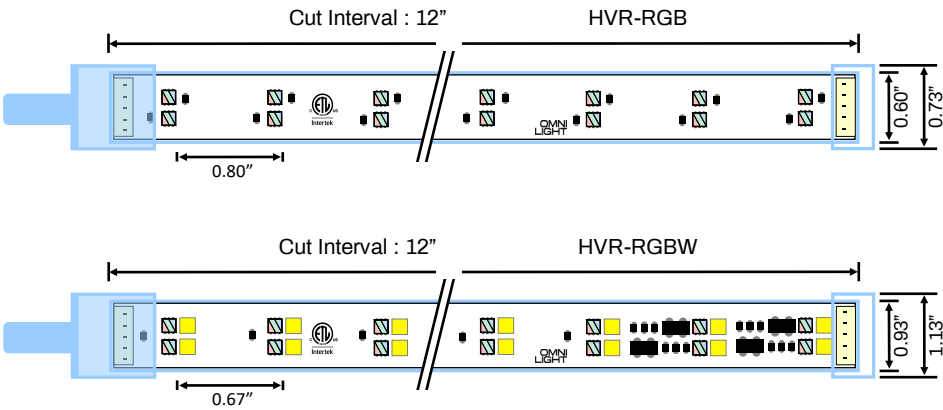

Note: Drawings not to scale.

Features:

- 120 Volt Ribbon
- Indoor/Outdoor
- RGB, RGBW
- Constant current
- 50,000 hour life
- 5 year warranty
- IP65

HVR Series ribbon is not field cuttable. Modifications must be made in our ETL facility. Cut intervals are for layout purposes only & do not include additional length due to endcaps.

Model Number	HVR-RGB-SO	HVR-RGBW-SO
Lumens/foot	40	65
Watts/foot	2	3
Power factor	> 0.90	> 0.90
Cut section length	12"	12"
Diode spacing (pitch) O.C.	0.80"	0.67"
Diodes per foot	30	60
Maximum run length	164'	164'



HVR series ribbon comes standard with a 6 foot lead with tinned wires.
For additional options, consult Omnilight