

HVR SERIES


INTERIOR/EXTERIOR



Date: _____ Project: _____ Type: _____

Ordering Guide:

Series	CCT	Output/Foot	Length
HVR	24 (2400K) 27 (2700K) 30 (3000K) 35 (3500K) 41 (4100K) 50 (5000K)	HO (4 watts) SHO (6watts)	CC @XX (custom cut, specify footage)

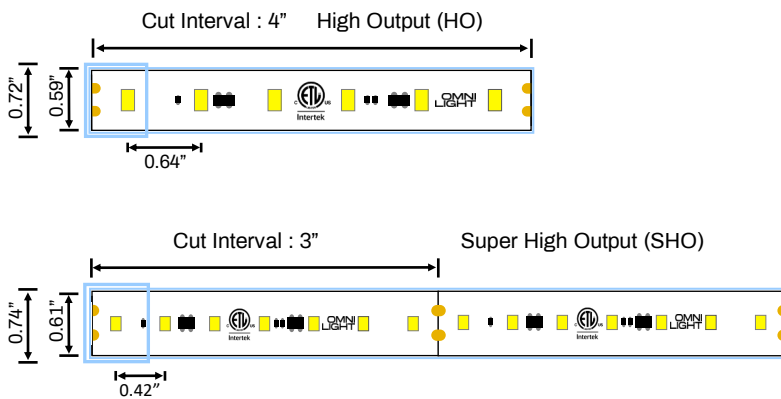

Features:

- 120 Volt Ribbon
- Indoor/Outdoor
- CRI 90+
- Dimmable: ELV
- Constant current
- 50,000 hour life
- 5 year warranty
- IP65

Note: Drawings not to scale.

HVR Series ribbon is not field cuttable. Modifications must be made in our ETL facility. Cut intervals are for layout purposes only & do not include additional length due to endcaps.

Model Number	HVR-XX-HO	HVR-XX-SHO
Lumens/foot	2400K: 260	390
	2700K: 270	430
	3000K: 275	460
	3500K: 300	480
	4000K: 320	500
	5000K: 340	520
Watts/foot	4	6
Power factor	> 0.93	> 0.90
Cut section length	4"	3"
Diode spacing (pitch) O.C.	0.64"	0.42"
Diodes per foot	18	28
Maximum run length	164'	100'



HVR series ribbon comes standard with a 6 foot lead with tinned wires.
For additional options, see the accessories page

HVR SERIES

INTERIOR/EXTERIOR



Date: _____ Project: _____ Type: _____

HVR Series ribbon is 120 volt ribbon, requiring all lengths and connections to be made in our factory in order to maintain ETL listing. Lead times apply.

Accessories:

(all ribbon accessories are assembled on the ribbon in accordance with ETL)




Mounting clips
(included)



6' cord & plug
(optional)





6", 12", 24" ribbon to
ribbon connector
(optional)


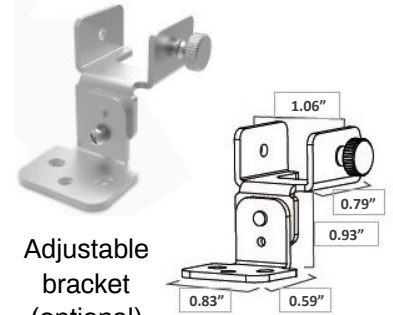


Adjustable
bracket
(optional)



Channels:

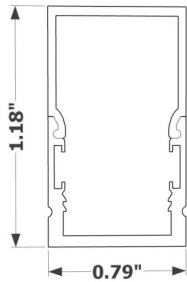



EXT-DWC-4
Deep aluminum channel
with raised opal matte lens

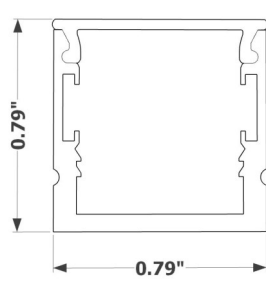

EXT-DWS-4
Deep aluminum channel
with flat opal matte lens

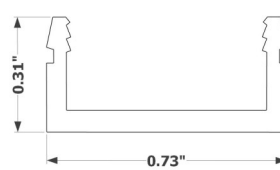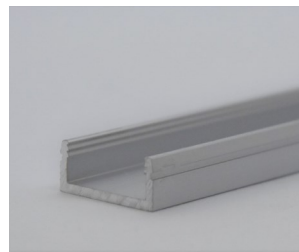

EXT-SNL-4
Shallow aluminum channel
with no lens

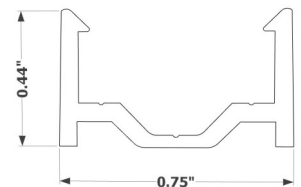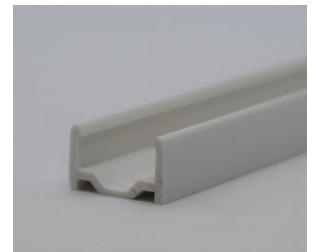

EXT-PNL-4
Shallow PVC channel with
no lens

HVR HO & SHO are fully diffused with EXT-DWC channel, HVR SHO is fully diffused with EXT-DWS channel



For safety, all connections are mounted outside of the channel.