

# ECONIC SERIES


## EXTERIOR



Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_

**Ordering Guide:**

<b>Series</b>		<b>CCT</b>		<b>Output/Foot</b>		<b>Length</b>
ECOWL	-	27 (2700K)	-	SO (1.5watts)	-	16 (full reel - 16.4 feet)
		30 (3000K)		HO (4.4watts)		
		35 (3500K)				
		41 (4100K)				

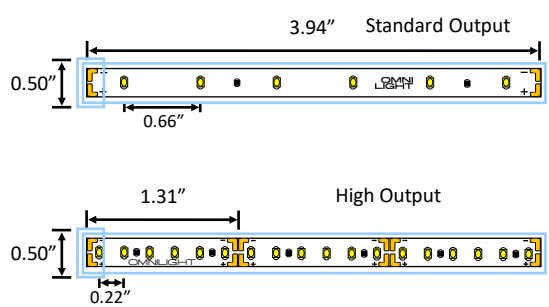

Note: Drawings not to scale.

**Features:**

- 120° beam angle
- 24 Volt
- CRI 90+
- Dimmable: ELV,MLV,TRIAC or 0-10V
- Field cuttable\*
- 50,000 hour life
- 5 year warranty
- IP65

Model Number	ECOWL-XX-SO	ECOWL-XX-HO
Lumens/foot	2700K 114	330
	3000K 122	352
	3500K 133	355
	4100K 142	372
Watts/foot	1.5	4.4
Cut section length	3.94"	1.31"
Diode spacing (pitch) O.C.	0.66"	0.22"
Diodes per foot	19	55
Maximum run length	35'	21'6"



16.4' bulk reels supplied with 24" IP65 lead

**\* cut ribbon cannot be repowered**

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies.