

# GENESIS SERIES

## EXTERIOR




Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_

### Ordering Guide:

Series	CCT	Output/Foot	Length
GENWL (IP65)	24 (2400K)	SO (1.8watts)	CC @XX (custom cut, specify footage)
GENWP* (IP68)	27 (2700K)	HO (3.5watts)	
	30 (3000K)		
	35 (3500K)		
	41 (4100K)		

\*GENWP ribbon is special order only

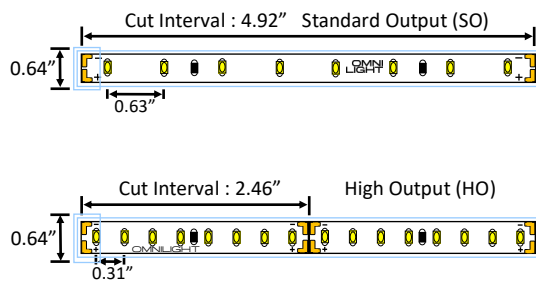

### Features:

- 120° beam angle
- 24 Volt
- CRI 90+
- 2 steps MacAdam Ellipse
- Dimmable: ELV,MLV,TRIAC or 0-10V
- Field cuttable
- 50,000 hour life
- 5 year warranty
- WL = IP65 / WP = IP68
- LM80

Note: Drawings not to scale.

Model Number	GENWL-XX-SO	GENWL-XX-HO	GENWP-XX-SO	GENWP-XX-HO	
Lumens/foot	2400K	150	325	150	325
	2700K	162	354	162	354
	3000K	170	362	170	362
	3500K	222	410	222	410
	4100K	229	454	229	454
Watts/foot		1.8	3.5	1.8	3.5
Cut section length		4.92"	2.46"	4.92"	2.46"
Diode spacing (pitch) O.C.		0.63"	0.31"	0.63"	0.31"
Diodes per foot		20	40	20	40
Maximum run length		35'	21'	35'	21'

Custom cut lengths supplied with 24" soldered lead standard - longer lead can be specified

Title 24  
**JA8**  
Compliant



All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies

OL1