

HORIZON SERIES


EXTERIOR



Date: _____ Project: _____ Type: _____

Ordering Guide:

| Series | | CCT | | Output/Foot | | Length |
|--------|---|--|---|--|---|--|
| HORWL | - | | - | | - | |
| | | 30 (3000K) | | SO (1.5watts) | | 16 (full reel - 16.4 feet) |
| | | 41 (4100K) | | HO (3.0watts) | | CC @XX (custom cut, specify footage) |

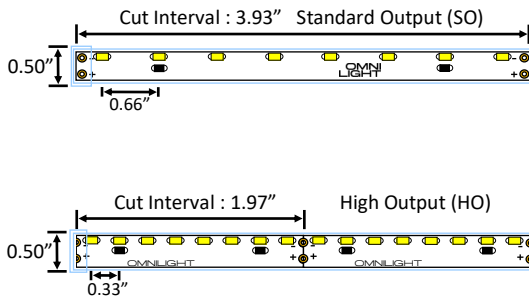

Features:

- 120° beam angle
- 24 Volt
- CRI 90+
- Side view
- Dimmable: ELV,MLV,TRIAC or 0-10V
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP65

Note: Drawings not to scale.

| Model Number | HORWL-XX-SO | HORWL-XX-HO |
|----------------------------|--------------|-------------|
| Lumens/foot | 3000K 92 | 215 |
| | 4100K 110 | 230 |
| Watts/foot | 1.5 | 3.0 |
| Cut section length | 3.93" | 1.97" |
| Diode spacing (pitch) O.C. | 0.66" | 0.33" |
| Diodes per foot | 20 | 40 |
| Maximum run length | 21' | 21' |



16.4' bulk reels supplied with 24" IP65 lead
 Custom cut lengths supplied with 24" soldered lead standard - longer lead can be specified

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies