

TRUE SERIES


EXTERIOR



Date: _____ Project: _____ Type: _____

Ordering Guide:

Series		CCT		Output/Foot		Length
TRUWL	-	22* (2200K)	-	SO (3.05watts)	-	CC @XX (custom cut, specify footage)
		27 (2700K)		HO (4.27watts)		
		30 (3000K)		SHO (5.49watts)		
		35 (3500K)				
		41 (4100K)				
		* - SHO ribbon only				

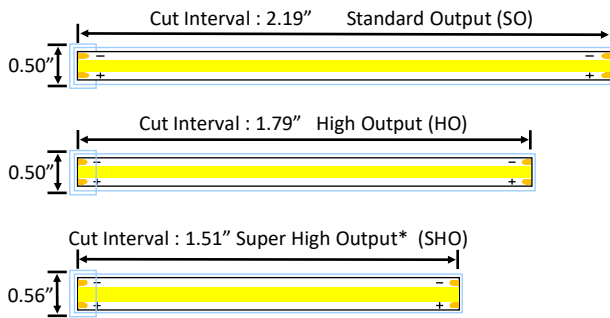

*SHO ribbon must be mounted in channel

Note: Drawings not to scale.

Features:

- 170° beam angle
- 24 Volt
- CRI 90+
- No diode imaging
- Dimmable: ELV,MLV,TRIAC or 0-10V
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP65

Model Number		TRUWL-XX-SO	TRUWL-XX-HO	TRUWL-XX-SHO
Lumens/foot	2200K	NA	NA	412
	2700K	268	366	433
	3000K	283	397	458
	3500K	293	406	473
	4100K	298	412	488
Watts/foot		3.05	4.27	5.49
Cut section length		2.19"	1.79"	1.51"
Diode spacing (pitch) O.C.		NA	NA	NA
Diodes per foot		NA	NA	NA
Maximum run length		31'	22'	17'

True series ribbon is available in custom cut lengths only.



All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies

OL1