

# HUE RGB SERIES


## INTERIOR



Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_

### Ordering Guide:

<b>Series</b>		<b>Output/Foot</b>		<b>Length</b>
HUE	-	RGB	-	
		SO (2.2watts)	-	16 (full reel - 16.4 feet)
		HO (4.4watts)		100 (full reel - 100 feet)
		SHO (8.8watts)		CC @XX (custom cut, specify footage)

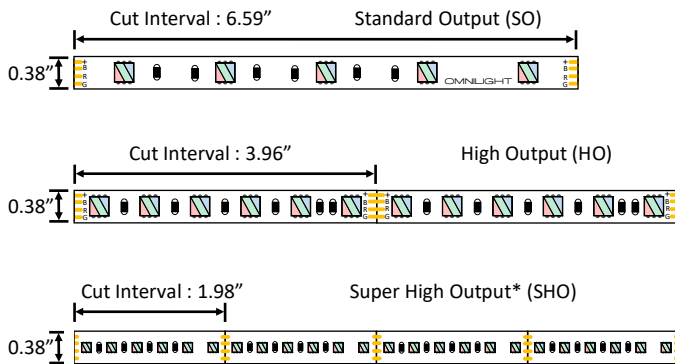

\*SHO ribbon must be mounted in channel

### Features:

- 120° beam angle
- 24 Volt
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP20

Note: Drawings not to scale.

Model Number	HUE-RGB-SO	HUE-RGB-HO	HUE-RGB-SHO
Lumens/foot	150	325	462
Watts/foot	2.2	4.4	8.8
Cut section length	6.59"	3.96"	1.98"
Diode spacing (pitch) O.C.	1.30"	0.66"	0.33"
Diodes per foot	9	19	33
Maximum run length	35'	21'	10'6"



100' bulk reels supplied with 24" soldered lead & (15) ribbon to power supply connectors  
 Custom cut lengths supplied with 24" soldered lead standard - longer lead can be specified

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies