

HIGHLIGHT CCT SERIES


INTERIOR



Date: Project: Type:

Ordering Guide:

Series	-	CCT	-	Output/Foot	-	Length
HLT	-	CCTAD	-	HO (5.85watts)	-	16 (full reel - 16.4 feet) CC @XX (custom cut, specify footage)

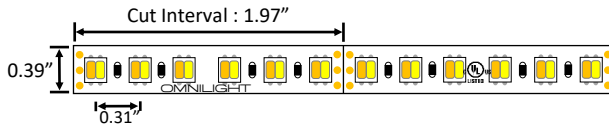

Note: Drawings not to scale.

Features:

- CCT adjustable 2500K—6000K
- 120° beam angle
- 24 Volt
- CRI 90+
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP20

Model Number	HLT-CCTAD-HO
Lumens/foot	460
Watts/foot	5.85
Cut section length	1.97"
Diode spacing (pitch) O.C.	0.31"
Diodes per foot	38
Maximum run length	16.4'



16.4' reels supplied with 24" soldered lead

Custom cut lengths supplied with 24" soldered lead standard - longer lead can be specified

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies

OL1