

# ARC SERIES


## INTERIOR



Date:  Project:  Type:

### Ordering Guide:

<b>Series</b>	-	<b>CCT</b>	-	<b>Output/Foot</b>	-	<b>Length</b>
ARC	-	27 (2700K) 30 (3000K) 35 (3500K) 41 (4100K)	-	SO (2.2watts)	-	16 (full reel - 16.4 feet) CC @XX (custom cut, specify footage)

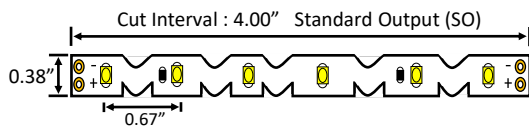

Note: Drawings not to scale.

### Features:

- 120° beam angle
- 24 Volt
- CRI 90+
- Side bend for tight radius
- Dimmable: ELV,MLV,TRIAC or 0-10V
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP20

Model Number	ARC-XX-SO	
Lumens/foot	2700K	185
	3000K	195
	3500K	205
	4100K	220
Watts/foot	2.2	
Cut section length	4.00"	
Diode spacing (pitch) O.C.	0.67"	
Diodes per foot	20	
Maximum run length	35'	



16.4' bulk reels supplied with 24" soldered lead  
 Custom cut lengths supplied with 24" soldered lead standard - longer lead can be specified

All Omnilight products are tested and warranted for use exclusively with Omnilight power supplies