

# ECONIC SERIES


## INTERIOR



Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_

**Ordering Guide:**

Series	CCT	Output/Foot	Length
ECO	27 (2700K)	SO (1.5watts)	16 (full reel - 16.4 feet)
	30 (3000K)	HO (4.4watts)	100 (full reel - 100 feet)
	35 (3500K)		
	41 (4100K)		

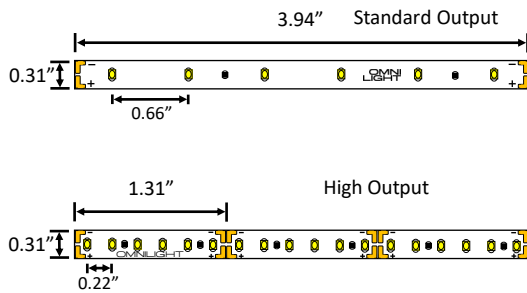

Note: Drawings not to scale.

**Features:**

- 120° beam angle
- 24 Volt
- CRI 90+
- Dimmable: ELV,MLV,TRIAC or 0-10V
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP20

Model Number	ECO-XX-SO	ECO-XX-HO
Lumens/foot	2700K 114	330
	3000K 122	352
	3500K 133	355
	4100K 142	372
Watts/foot	1.5	4.4
Cut section length	3.94"	1.31"
Diode spacing (pitch) O.C.	0.66"	0.22"
Diodes per foot	19	55
Maximum run length	35'	21'6"



16.4' bulk reels supplied with 24" soldered lead & (3) ribbon to power supply connectors  
 100' bulk reels supplied with 24" soldered lead & (12) ribbon to power supply connectors

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies.