

ECONIC SERIES


INTERIOR



Date: Project: Type:

Ordering Guide:

Series	CCT	Output/Foot	Length
ECO	27 (2700K)	SO (1.50watts)	16 (full reel - 16.4 feet)
	30 (3000K)	WO (2.95watts)	100 (full reel - 100 feet)
	35 (3500K)	HO (4.40watts)	
	41 (4100K)		

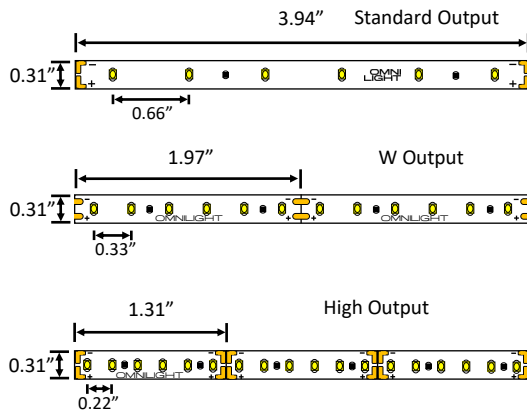

Features:

- 120° beam angle
- 24 Volt
- CRI 90+
- Dimmable: ELV,MLV,TRIAC or 0-10V
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP20

Note: Drawings not to scale.

Model Number	ECO-XX-SO	ECO-XX-WO	ECO-XX-HO	
Lumens/foot	2700K	114	265	330
	3000K	122	275	352
	3500K	133	285	355
	4100K	142	295	372
Watts/foot		1.50	2.95	4.40
Cut section length		3.94"	1.97"	1.31"
Diode spacing (pitch) O.C.		0.66"	0.33"	0.22"
Diodes per foot		19	37	55
Maximum run length		35'	32'	21'6"



16.4' bulk reels supplied with 24" soldered lead & (3) ribbon to power supply connectors
 100' bulk reels supplied with 24" soldered lead & (12) ribbon to power supply connectors

All Omnilight products are tested and warranted for use exclusively with Omnilight power supplies.