

# HORIZON SERIES


## INTERIOR



Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_

### Ordering Guide:

Series	CCT	Output/Foot	Length
HOR	30 (3000K) 41 (4100K)	SO (1.5watts) HO (3.0watts)	16 (full reel - 16.4 feet) CC @XX (custom cut, specify footage)

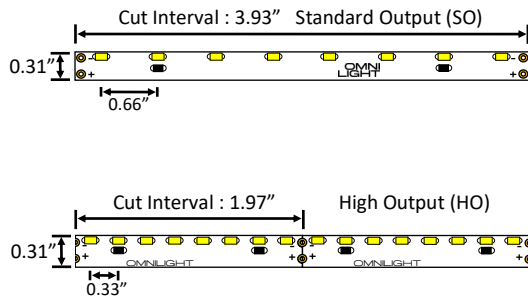

### Features:

- 120° beam angle
- 24 Volt
- CRI 90+
- Side view
- Dimmable: ELV,MLV,TRIAC or 0-10V
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP20

Note: Drawings not to scale.

Model Number	HOR-XX-SO	HOR-XX-HO
Lumens/foot	3000K 92	215
	4100K 110	230
Watts/foot	1.5	3.0
Cut section length	3.93"	1.97"
Diode spacing (pitch) O.C.	0.66"	0.33"
Diodes per foot	20	40
Maximum run length	35'	32'



16.4' bulk reels supplied with 24" soldered lead  
 Custom cut lengths supplied with 24" soldered lead standard - longer lead can be specified

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies