

# INCLINE SERIES


## INTERIOR



Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_

### Ordering Guide:

<b>Series</b>	-	<b>CCT</b>	-	<b>Output/Foot</b>	-	<b>Length</b>
INC		27 (2700K) 30 (3000K) 35 (3500K) 41 (4100K)		SO (2.2watts)		16 (full reel - 16.4 feet) CC @XX (custom cut, specify footage)

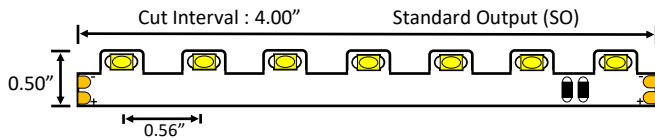

Note: Drawings not to scale.

### Features:

- 120° beam angle
- 24 Volt
- CRI 90+
- Adjustable, tabbed diodes
- Dimmable: ELV,MLV,TRIAC or 0-10V
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP20

Model Number	INC-XX-SO	
Lumens/foot	2700K	175
	3000K	185
	3500K	195
	4100K	210
Watts/foot	2.2	
Cut section length	4.00"	
Diode spacing (pitch) O.C.	0.56"	
Diodes per foot	20	
Maximum run length	35'	



16.4' reels supplied with 24" soldered lead

Custom cut lengths supplied with 24" soldered lead standard - longer lead can be specified

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies