

# TRUE SERIES


## INTERIOR



Date: \_\_\_\_\_ Project: \_\_\_\_\_ Type: \_\_\_\_\_

### Ordering Guide:

<b>Series</b>	-	<b>CCT</b>	-	<b>Output/Foot</b>	-	<b>Length</b>
TRU	-	22 (2200K) 27 (2700K) 30 (3000K) 35 (3500K) 41 (4100K)	-	SO (3.05watts) HO (4.27watts) SHO (5.49watts)	-	CC @XX (custom cut, specify footage)

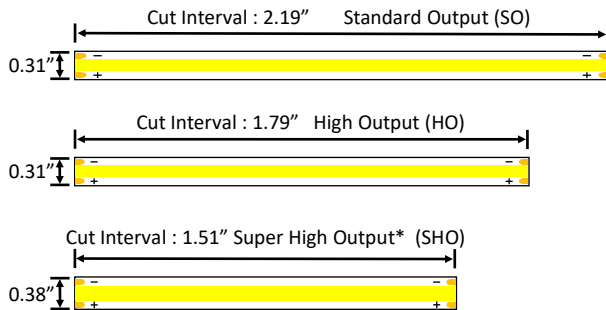

\*SHO ribbon must be mounted in channel

Note: Drawings not to scale.

### Features:

- 170° beam angle
- 24 Volt
- CRI 90+
- No diode imaging
- Dimmable: ELV,MLV,TRIAC or 0-10V
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP20

Model Number	TRU-XX-SO	TRU-XX-HO	TRU-XX-SHO
Lumens/foot	2200K 230	2700K 322	3000K 412
	3500K 268	4100K 382	458
	293	406	473
	298	412	488
Watts/foot	3.05	4.27	5.49
Cut section length	2.19"	1.79"	1.51"
Diode spacing (pitch) O.C.	NA	NA	NA
Diodes per foot	NA	NA	NA
Maximum run length	31'	22'	17'



True series ribbon is available in custom cut lengths only.

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies