

TRUE SERIES


INTERIOR



Date: _____ Project: _____ Type: _____

Ordering Guide:

Series	CCT	Output/Foot	Length
TRU	22* (2200K) 27 (2700K) 30 (3000K) 35* (3500K) 41 (4100K) * - SHO ribbon only	SO (3.05watts) HO (4.27watts) SHO (5.49watts)	CC @XX (custom cut, specify footage)

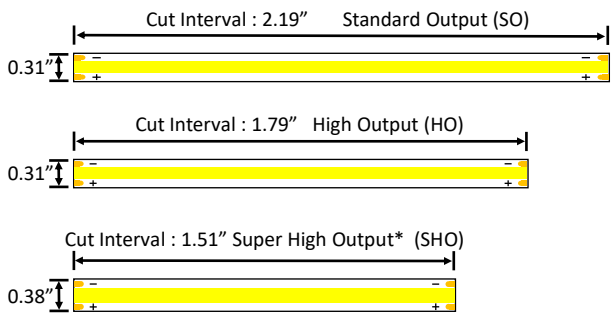

*SHO ribbon must be mounted in channel

Note: Drawings not to scale.

Features:

- 170° beam angle
- 24 Volt
- CRI 90+
- No diode imaging
- Dimmable: ELV,MLV,TRIAC or 0-10V
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP20

Model Number	TRU-XX-SO	TRU-XX-HO	TRU-XX-SHO
Lumens/foot	2200K	NA	NA
	2700K	268	366
	3000K	283	397
	3500K	NA	NA
	4100K	298	412
Watts/foot		3.05	4.27
Cut section length		2.19"	1.79"
Diode spacing (pitch) O.C.		NA	NA
Diodes per foot		NA	NA
Maximum run length		31'	22'
			17'



True series ribbon is available in custom cut lengths only.

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies

OL1