

HUE COLORS SERIES


EXTERIOR



Date: _____ Project: _____ Type: _____

Ordering Guide:

Series	-	Color	-	Output/Foot	-	Length
HUEWL	-	RD (Red) GR (Green) BL (Blue) LAVA (1650K) FROZEN (28,000K)	-	SO (1.52watts)	-	16 (full reel - 16.4 feet) CC @XX (custom cut, specify footage)

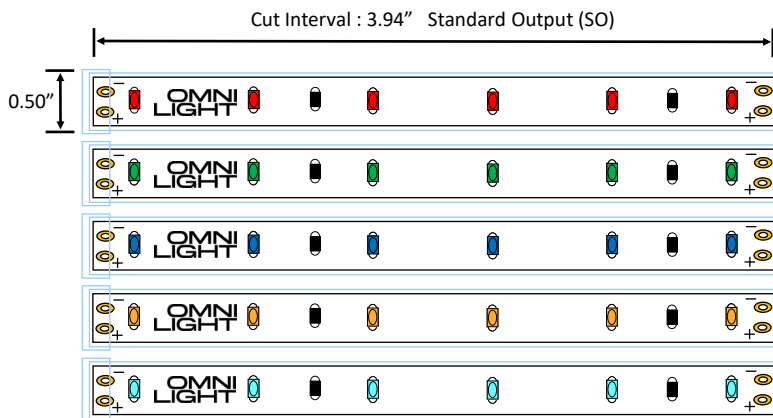

Features:

- 120° beam angle
- 24 Volt
- Dimmable: ELV,MLV,TRIAC or 0-10V
- Field cuttable
- 50,000 hour life
- 5 year warranty
- IP65

Note: Drawings not to scale.

HUEWL-LAVA-SO-16 has been certified wildlife friendly



Model Number	HUEWL-XX-SO	
Wavelength, Kelvin	Red	617-627nm
	Green	512-522nm
	Blue	461-471nm
	Lava	1650K
	Frozen	28,000K
Watts/foot	1.52	
Cut section length	3.94"	
Diode spacing (pitch) O.C.	0.62"	
Diodes per foot	18	
Maximum run length	35'	



16.4' bulk reels supplied with 24" IP65 lead

Custom cut lengths supplied with 24" soldered lead standard - longer lead can be specified

All Omnilight products are tested and warrantied for use exclusively with Omnilight power supplies

OL1